

FIG. 1

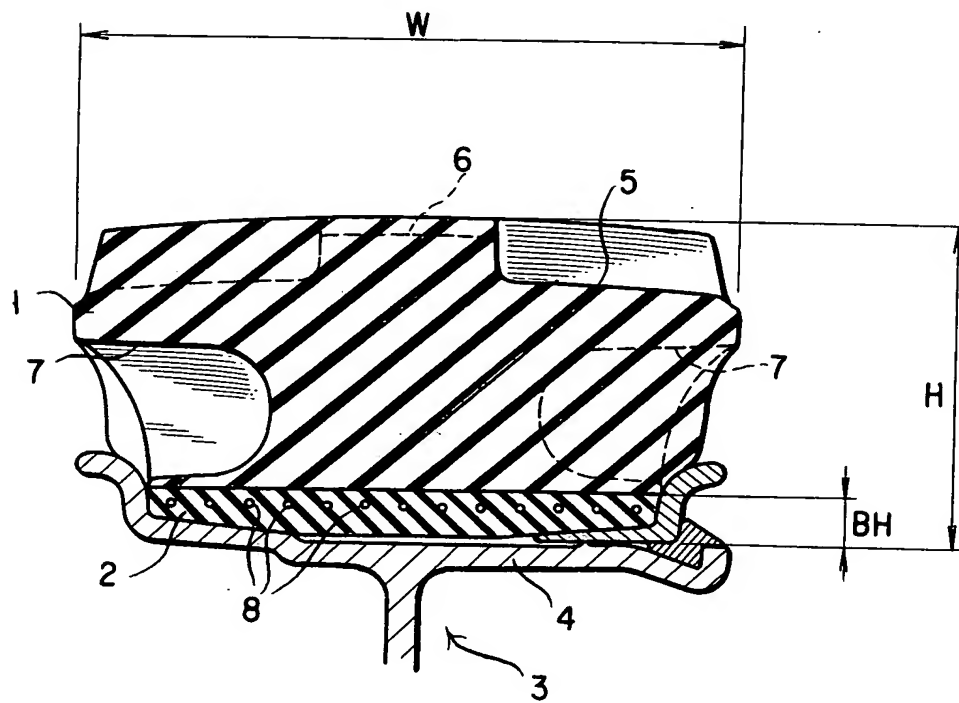


FIG. 2

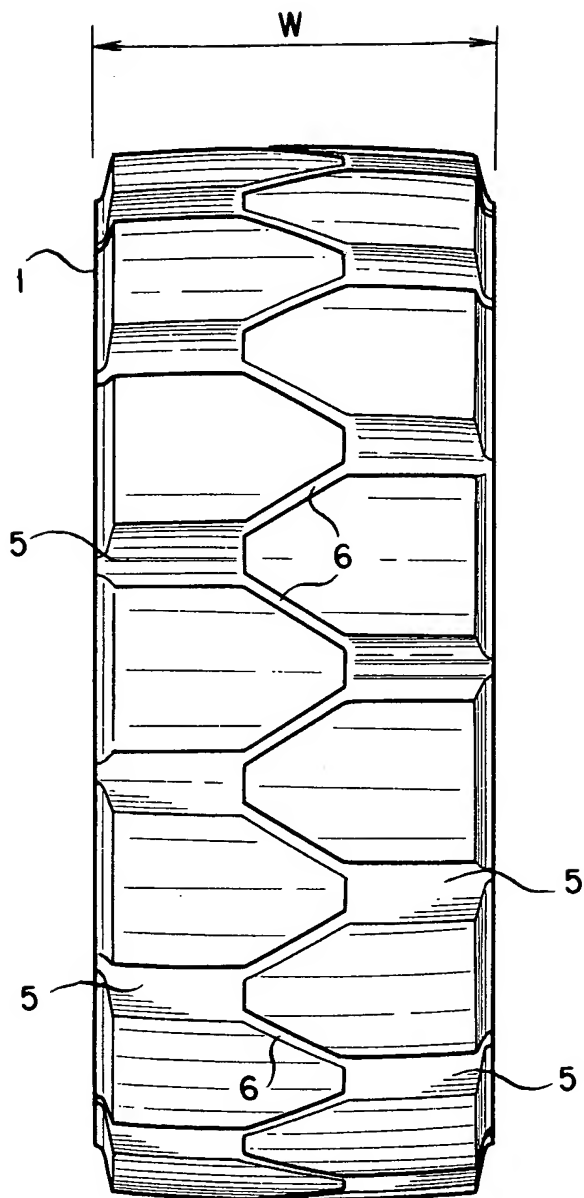


FIG. 2 is a cross-sectional view of a tire in accordance with the present invention. The tire includes a tread 1, a sidewall 5, and a bottom 6. The tread 1 is formed by a series of horizontal grooves 5. The sidewall 5 is formed by a series of vertical grooves 6. The bottom 6 is formed by a series of horizontal grooves 5.

FIG. 3

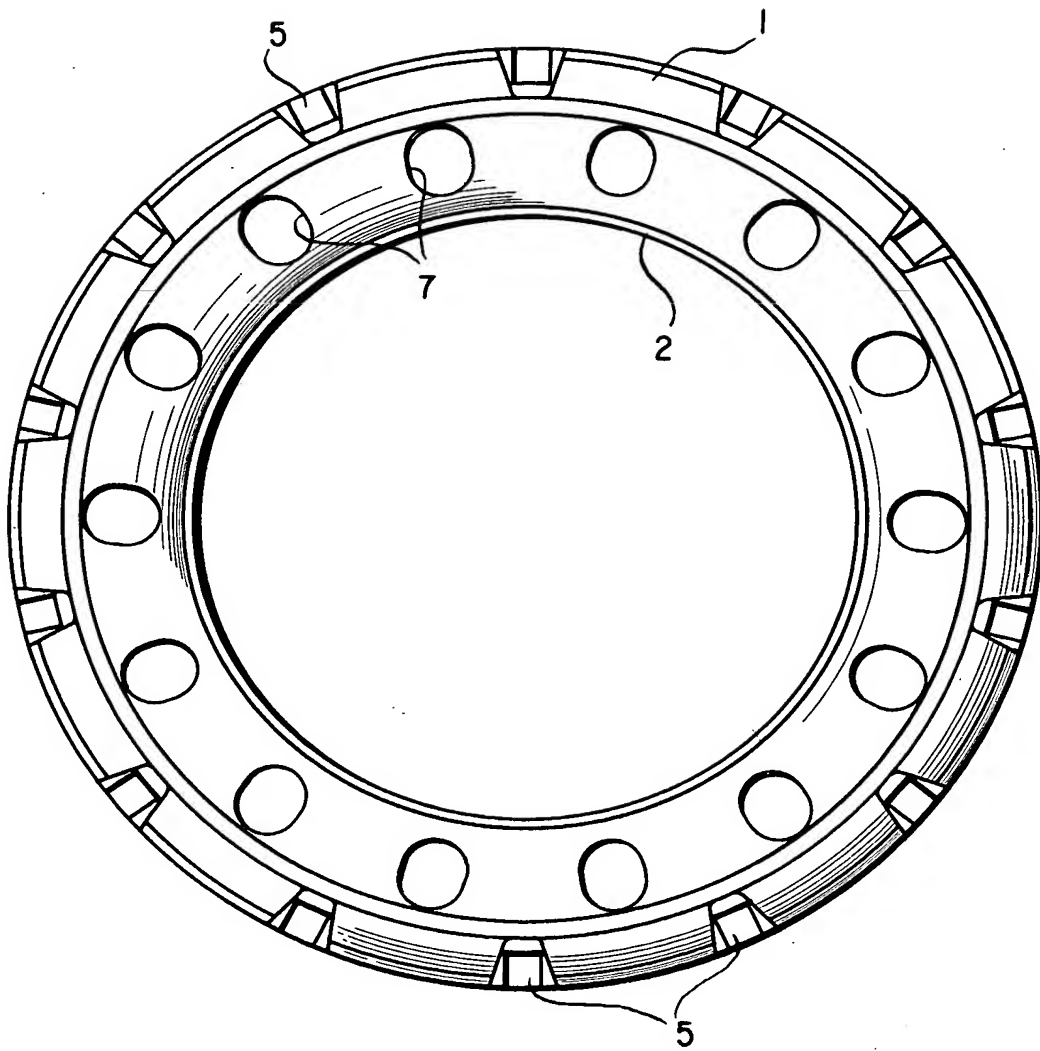


FIG. 4

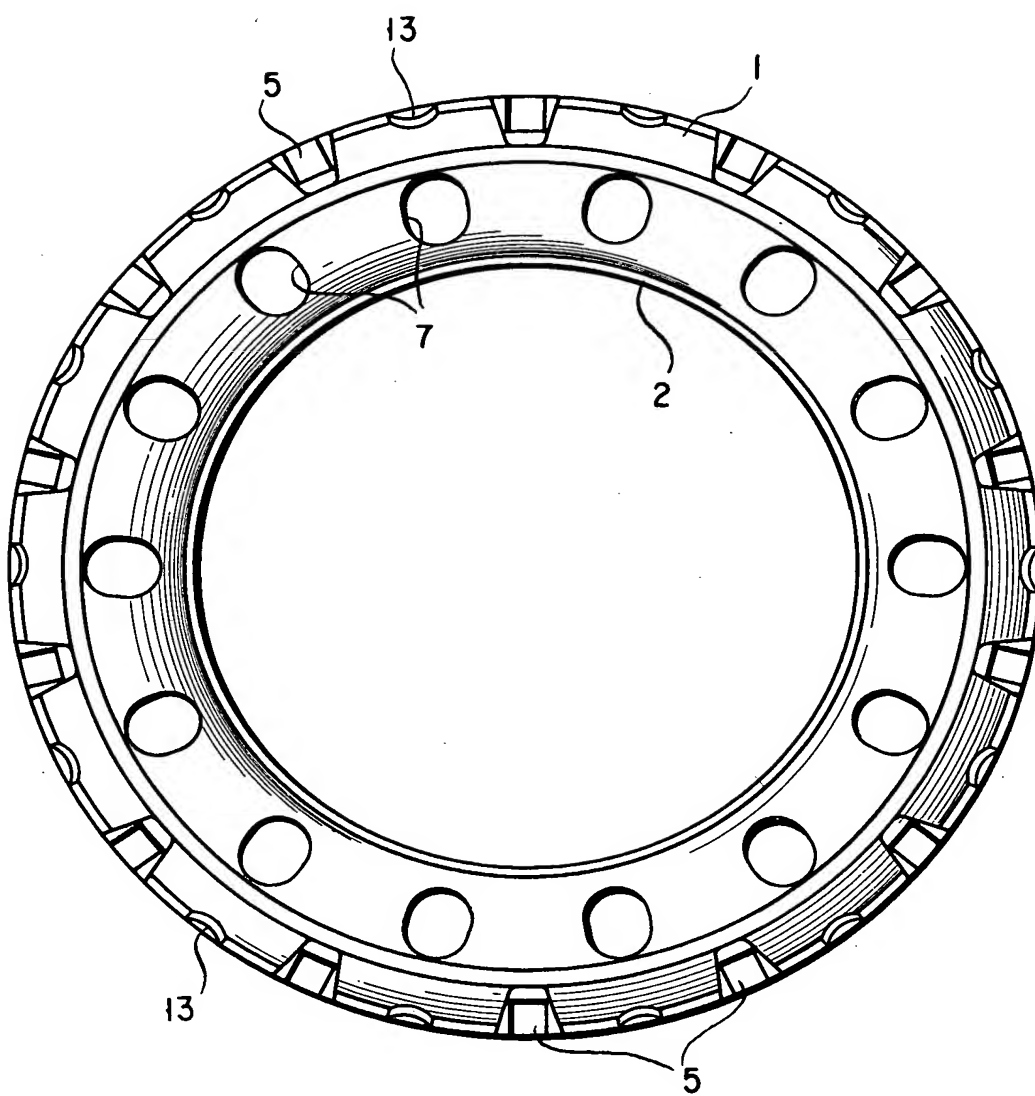


FIG. 5

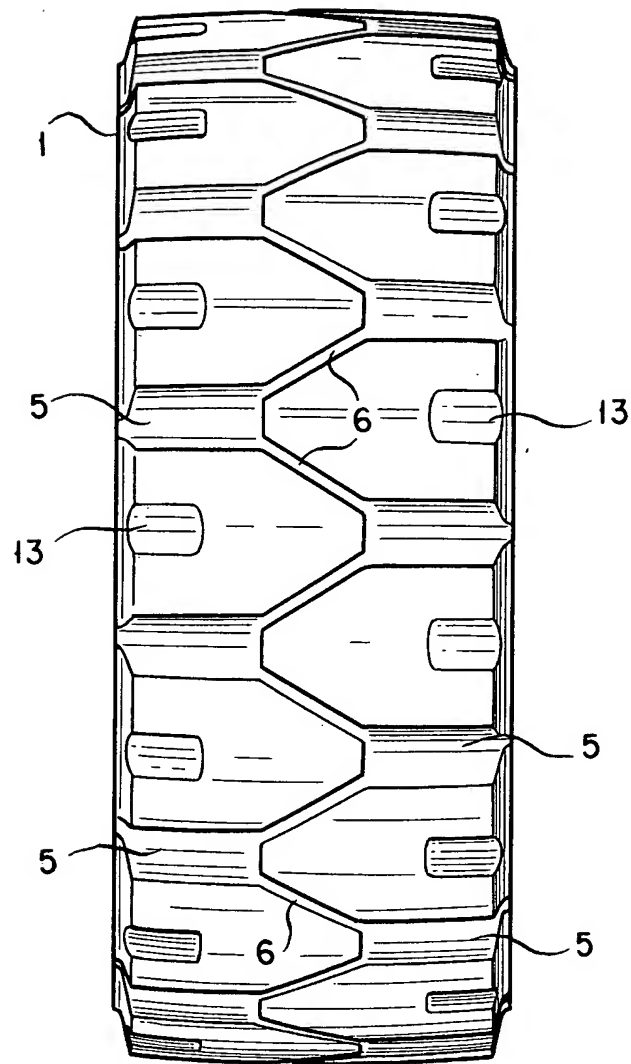


FIG. 6

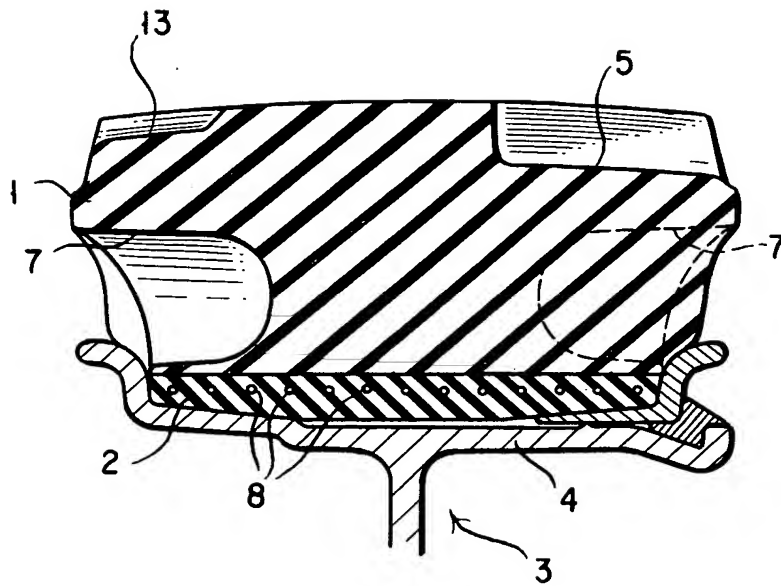


FIG. 7A

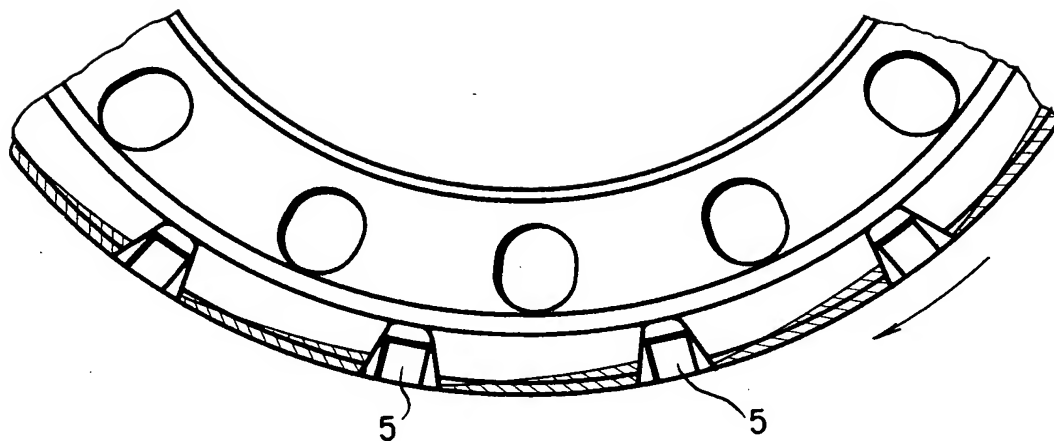


FIG. 7B

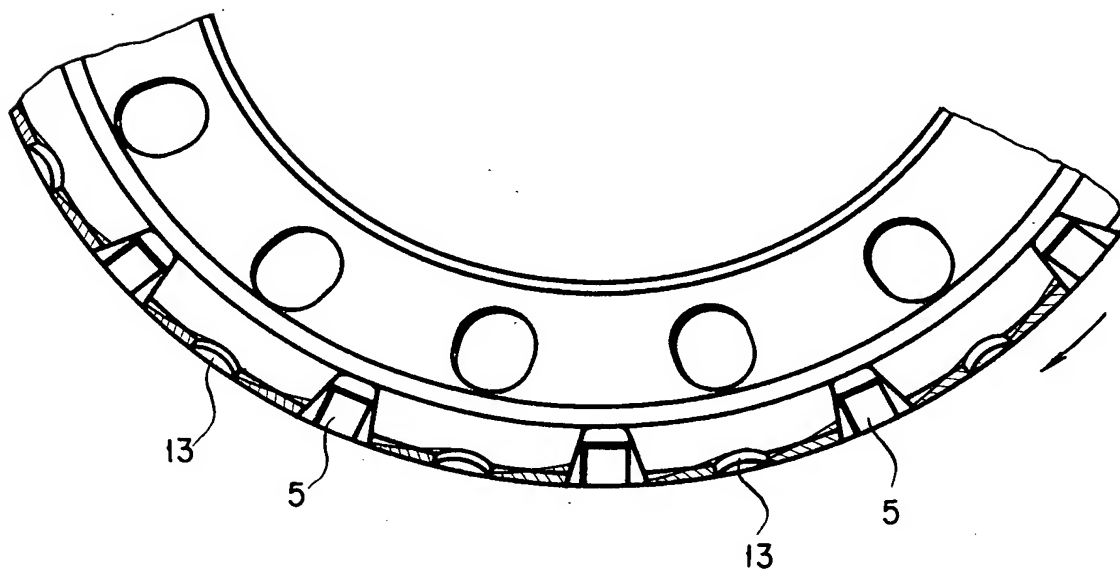


FIG. 8

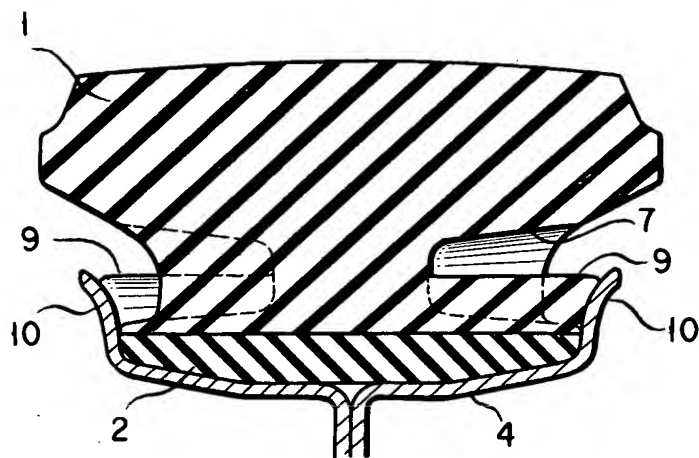


FIG. 9

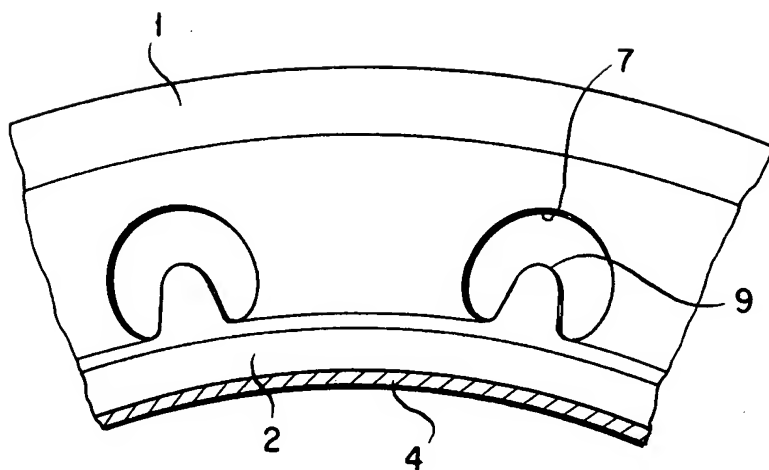


FIG. 10

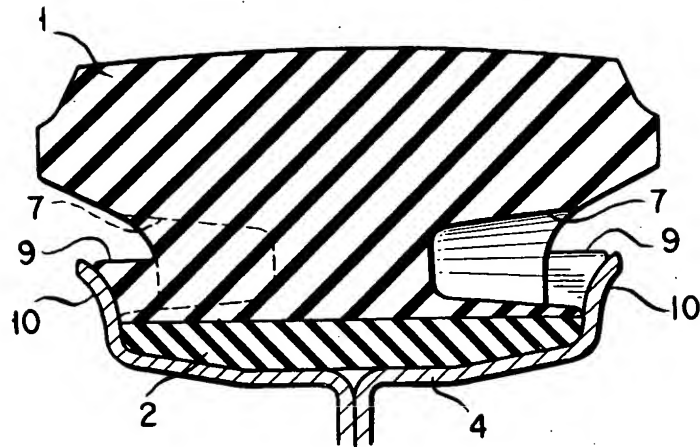


FIG. 11

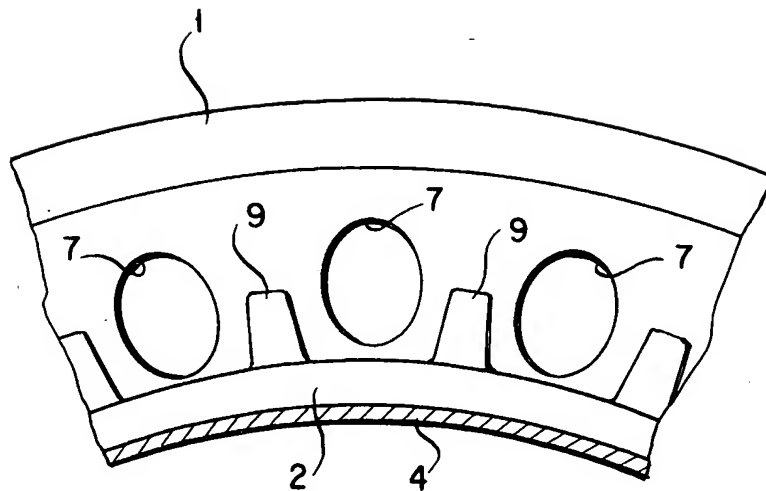


FIG. 12

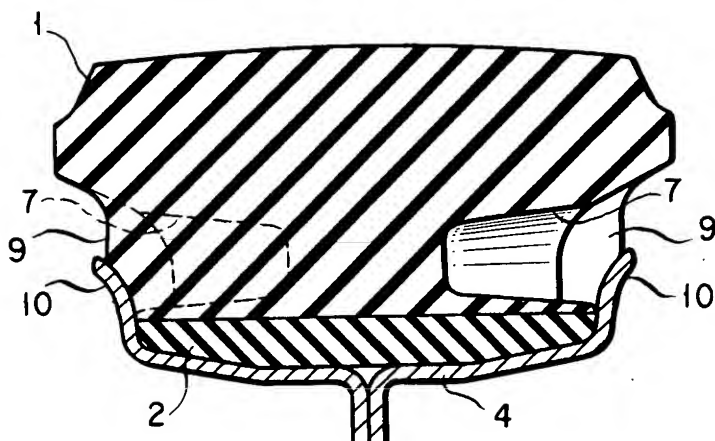


FIG. 13

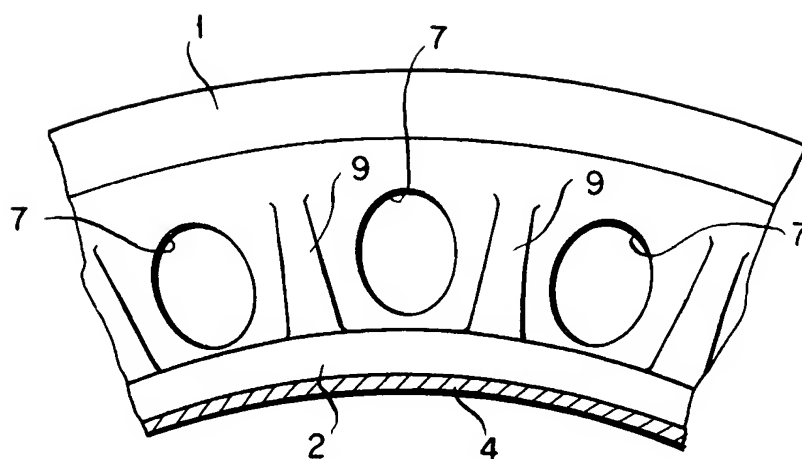


FIG. 14

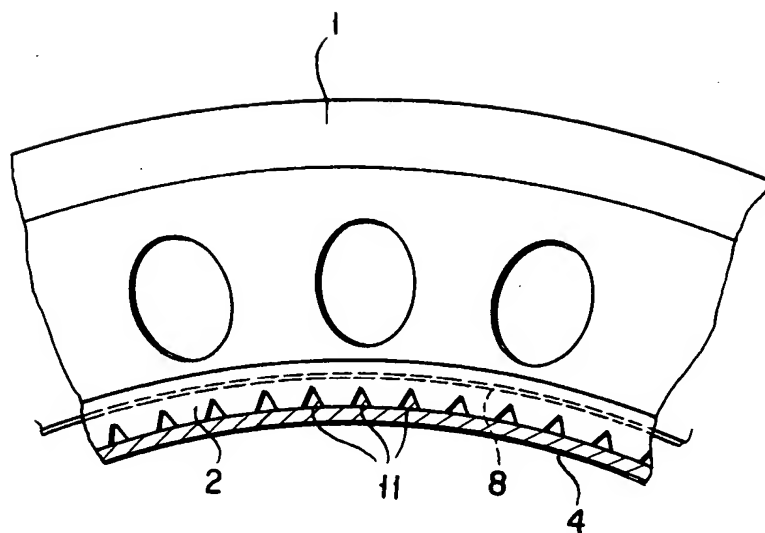


FIG. 15

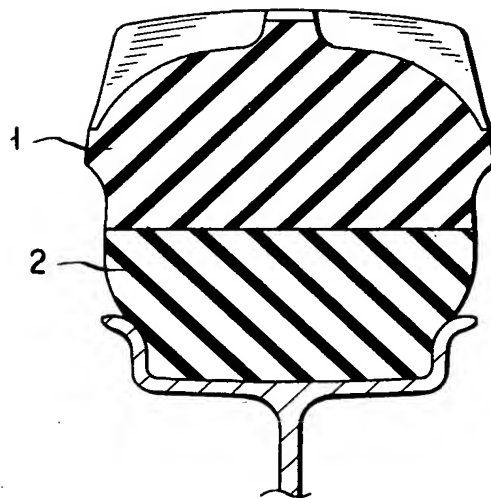


FIG. 16

